



290 East 56th Avenue  
 Denver, CO 80216  
 303-296-9696  
 dalyteusa.com




Salesperson: \_\_\_\_\_


E-Mail: \_\_\_\_\_

# CURB MOUNT CIRCULAR SKYLIGHT WORKSHEET

Sold To: \_\_\_\_\_ Phone: \_\_\_\_\_ Fax: \_\_\_\_\_  
 Address: \_\_\_\_\_ City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_  
 Contact: \_\_\_\_\_ Project/PO: \_\_\_\_\_ E-Mail: \_\_\_\_\_

QTY.	Outside Curb Dimension (OCD) <small>See Below (In Inches)</small>	Custom Dome Height <small>(Standard is 20-25% of smaller dimension if not specified)</small>	Other Notes

<p><b>Skylight Type:</b> <small>(Choose One)</small></p> <p><input type="checkbox"/> Standard Acrylic Dome</p>  <p><input type="checkbox"/> Optional Flat 2:12 Minimum Slope</p>  <p><input type="checkbox"/> Optional Custom Shape</p>	<p><b>Frame Finish:</b> <small>(Choose One)</small></p> <p><input type="checkbox"/> Mill Finish</p> <p><input type="checkbox"/> Custom Frame Finish:</p> <hr/> <hr/> <hr/> <p><small>Note: Curb Mount Circular units are rolled or stretched formed and cannot be anodized.</small></p>	<p><b>Glazing:</b> <small>(Choose One)</small></p> <p><b>Standard Double Acrylic Dome</b></p> <p><input type="checkbox"/> Clear over Clear  <input type="checkbox"/> Bronze over Clear  <input type="checkbox"/> Clear over White</p> <p><b>Optional Single Acrylic Dome</b></p> <p><input type="checkbox"/> Clear <input type="checkbox"/> Bronze <input type="checkbox"/> White</p> <hr/> <p><b>Optional:</b></p> <p><input type="checkbox"/> Flat Insulated Glass <small>Standard: Low-E Clear</small></p> <p><input type="checkbox"/> Optional Bronze  <input type="checkbox"/> Custom: _____</p> <hr/> <p><input type="checkbox"/> Flat Multiwall Translucent Polycarbonate Panel <small>Standard: 16mm (5/8")</small></p> <p><input type="checkbox"/> Clear</p> <p><b>Optional:</b></p> <p><input type="checkbox"/> Bronze <input type="checkbox"/> Opal (White)  <input type="checkbox"/> Custom: _____</p>	<p><b>OSHA Fall-Guard Protection:</b></p> <p><input type="checkbox"/> YES: Include Optional Custom OSHA Fall-Guard Protection.</p>  <p><small>FALL-GUARD (SHIPPED LOOSE), GALVANIZED FINISH</small></p> <p><input type="checkbox"/> NO: OSHA Fall-Guards NOT Needed Because There Are Other Types of OSHA Fall Protection By Others.</p> <p>Initial _____</p> <hr/> <p><b>Options:</b></p> <p><input type="checkbox"/> High Impact (Outer Dome)</p> <p><input type="checkbox"/> Clear <input type="checkbox"/> White</p> <p><b>Installation Supplies:</b></p> <p><input type="checkbox"/> Installation Kit          -3/4" Wide x 1/4" High x 35' Long Curb Gasket, and          -(20) #10x2" PPH SMS Installation Screws</p>
---	---	--	---

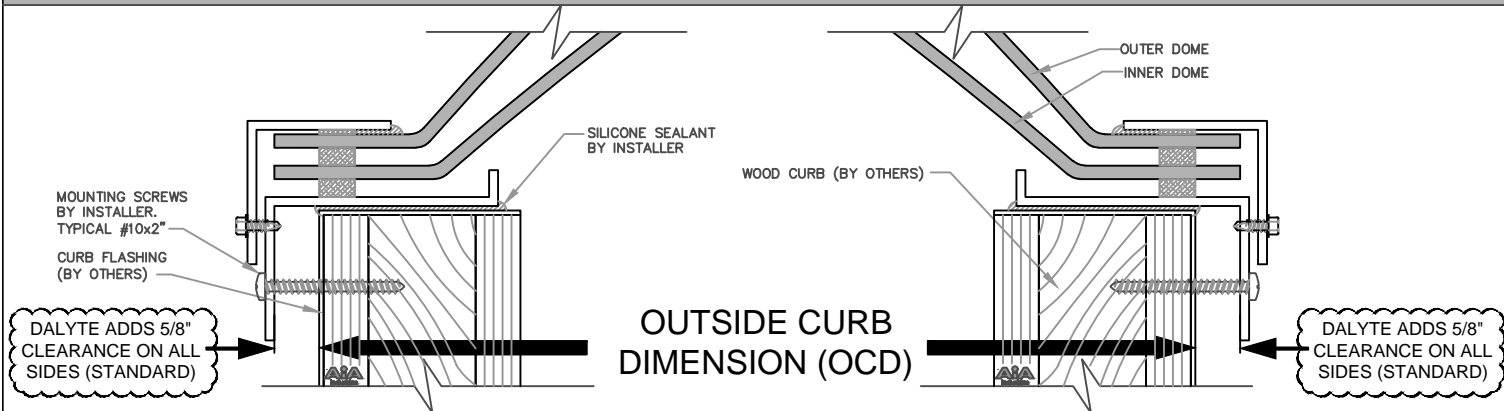

Approved By: \_\_\_\_\_ Date: \_\_\_\_\_

**Specifications:** Skylight as manufactured by DalYTE Denver Colorado. Units consist of an extruded aluminum 6063-T6. Inner frame (0.070") with a polyurethane thermal-break to reduce thermal transfer throughout the aluminum frame, and to minimize condensation in the interior frame. Outer frame (0.060") thick. Skylights are constructed to withstand 40 P.S.F. downward, and 20 P.S.F. outward loading and constructed to minimize air infiltration with provisions for adequate moisture weeping to exterior. Dome units shall consist of an acrylic thermal-formed free blown dome(s) in industry standard thickness as determined by overall size with peel-off protective film. Glass units shall be constructed of sealed insulated glass units with tempered outer lite, and laminated inner lite.

**Note:** Condensation is not a skylight defect, it is a result of atmospheric conditions inside and outside of the building. Skylights are designed to structurally account for expansion and contraction. Occasionally there may be audible popping noises especially with acrylic domes. All skylight glazing (transparent material) will have minor distortion especially when viewing at an angle. Tolerances are +/- 3/16".