



290 East 56th Avenue
 Denver, CO 80216
 303-296-9696
 dalyteusa.com



Salesperson: _____

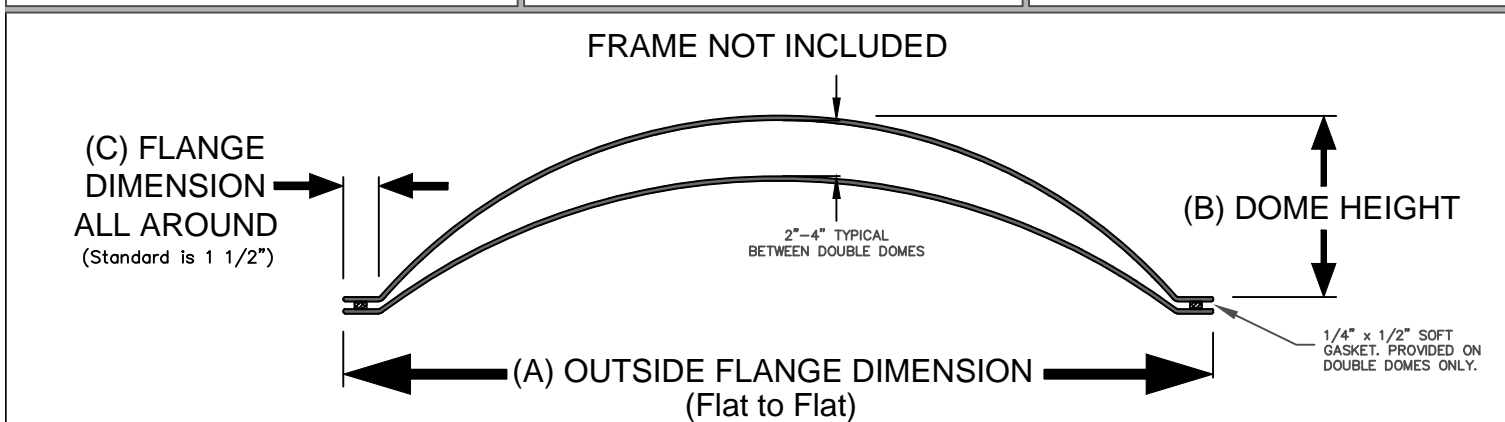
E-Mail: _____

REPLACEMENT CIRCULAR DOME WORKSHEET

Sold To: _____ Phone: _____ Fax: _____
 Address: _____ City: _____ State: _____ Zip: _____
 Contact: _____ Project/PO: _____ E-Mail: _____

QTY.	(A) Outside Flange Dimension Flat to Flat	(B) Dome Height 20-25% of smaller dimension if not specified	(C) Flange Dimension All Around (Standard is 1 1/2")	Other Notes

<p>Dome Type:</p> <p>Standard Acrylic Free Blown Dome</p>  <p>Type: S (Gradual Rise)</p> 	<p>Glazing: (Choose One)</p> <p>Standard Double Acrylic Dome</p> <p><input type="checkbox"/> Clear over Clear <input type="checkbox"/> Bronze over Clear <input type="checkbox"/> Clear over White</p> <p>Options:</p> <p>Optional Single Acrylic Dome</p> <p><input type="checkbox"/> Clear <input type="checkbox"/> Bronze <input type="checkbox"/> Opal</p> <p>Optional Dome Upgrade:</p> <p><input type="checkbox"/> High Impact (Outer Dome)</p> <p><input type="checkbox"/> Clear <input type="checkbox"/> White</p>	<p>Installation Supplies:</p> <p><input type="checkbox"/> Closed Cell Foam Tape -3/4" Wide x 1/4" High x 35' Long</p>
---	---	---



Approved By: _____ Date: _____

Specifications: Replacement Skylight Domes (lenses without metal frame) as manufactured by Daylight Denver, Colorado consists of an acrylic thermal-formed free blown dome(s) in industry standard thickness as determined by overall size. These replacement domes are designed to fit most standard skylight frames. Replacement domes are unassembled and come with a peel-off protective film. Tolerances are +/- 1/8". Note: all replacement domes will have inherent minor distortions especially when viewed at an angle.

DALYTE Skylights are not designed to support people. OCHA approved safety devices are to be used around skylight for personal safety. This worksheet will supersede all details on quotation - Please double check for accuracy.